



Digital Night Vision Riflescopes

**SIGHTLINE**

**RETICLE CATALOGUE**



**SIGHTLINE**  
N450 / N455  
N450S / N455S

**SIGHTLINE**  
N470 / N475  
N470S / N475S



Non-scalable reticles

**D50i**  
**X54i**  
**M58i**

Scalable reticles

**X51Fi-300**  
**M56Fi**  
**M57Fi**

Non-scalable reticles

**D50i**  
**X54i**  
**M58i**

Scalable reticles

**X51Fi-300**  
**M56Fi**  
**M57Fi**

**RETICLE CATALOGUE**



Digital NV Riflescopes

**SIGHTLINE**


N450 / N455  
N450S / N455S



Reticle

**D50i**

Reticle parameters (for 4x magnification)

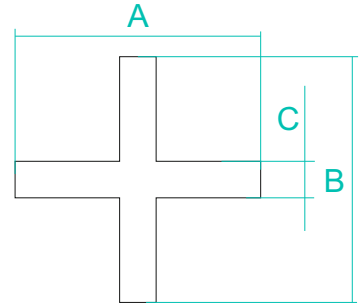


	MOA	cm @ 100 m
<b>Section A</b>	2.6	7.4
<b>Section B</b>	2.6	7.4
<b>Section C</b>	0.4	1.1



Digital NV Riflescopes

# SIGHTLINE


N450 / N455  
N450S / N455S

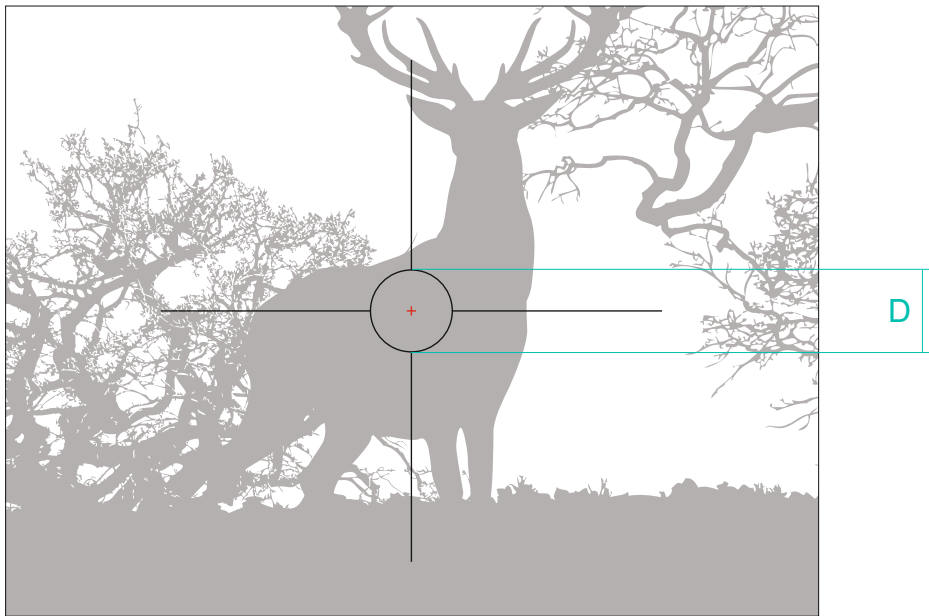

Reticle

# X54i

Reticle parameters (for 4x magnification)



	MOA	cm @ 100 m
<b>Section A</b>	2.6	7.4
<b>Section B</b>	2.6	7.4
<b>Section C</b>	0.4	1.1
<b>Section D</b>	34.4	100



Digital NV Riflescopes



# SIGHTLINE

N450 / N455  
N450S / N455S

Reticle

# M58i

Reticle parameters

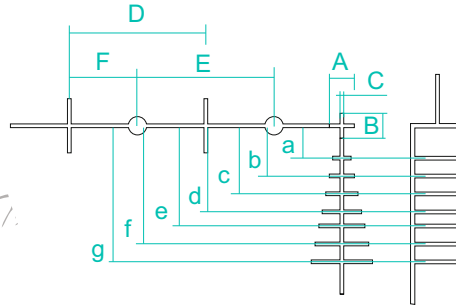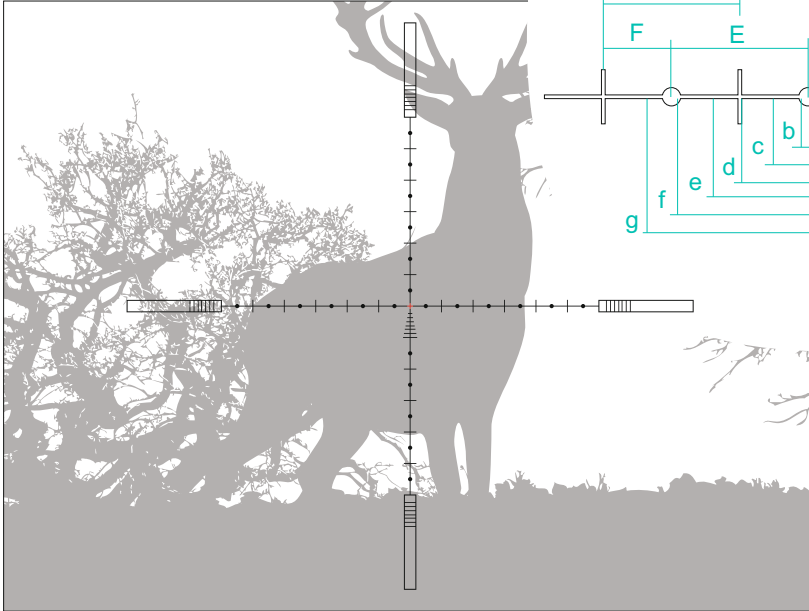

	MOA	cm @ 100 m
<b>Section A</b>	2.6	7.4 on 4x
<b>Section B</b>	2.6	7.4 on 4x
<b>Section C</b>	0.4	1.1 on 4x
<b>Section D</b>	3.5	10 (1 mil) on 16x
<b>Section E</b>	3.5	10 (1 mil) on 16x
<b>Section F</b>	3.5	10 (1 mil) on 8x

**Section a:** 1 mil (10 cm @ 100 m) on 4x

**Section b:** 1 mil (10 cm @ 100 m) on 6x

**Section c:** 1 mil (10 cm @ 100 m) on 8x

**Section d:** 1 mil (10 cm @ 100 m) on 10x

**Section e:** 1 mil (10 cm @ 100 m) on 12x

**Section f:** 1 mil (10 cm @ 100 m) on 14x

**Section g:** 1 mil (10 cm @ 100 m) on 16x



Digital NV Riflescopes



**SIGHTLINE**

N450 / N455  
N450S / N455S

Reticle

# X51 FI-300

Reticle parameters (apply to all magnifications)

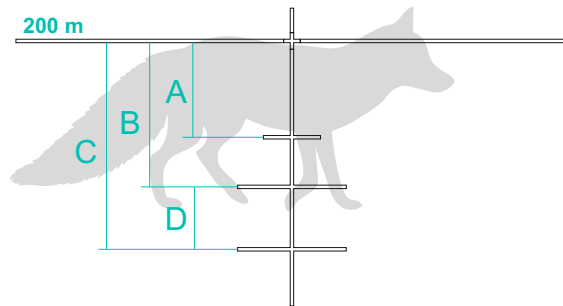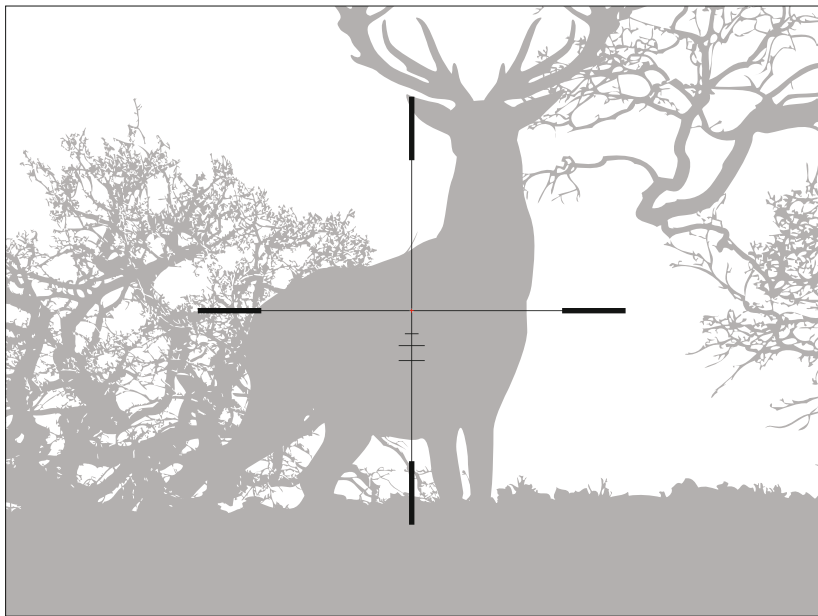


	200 m	300 m
<b>Section A</b>	15 cm (fox body)	23 cm (roe deer body)
<b>Section B</b>	23 cm (roe deer body)	35 cm (wild boar body)
<b>Section C</b>	35 cm (wild boar body)	50 cm (deer body)
<b>Section D</b>	—	15 cm (fox body)



Digital NV Riflescopes

# SIGHTLINE


N450 / N455  
N450S / N455S

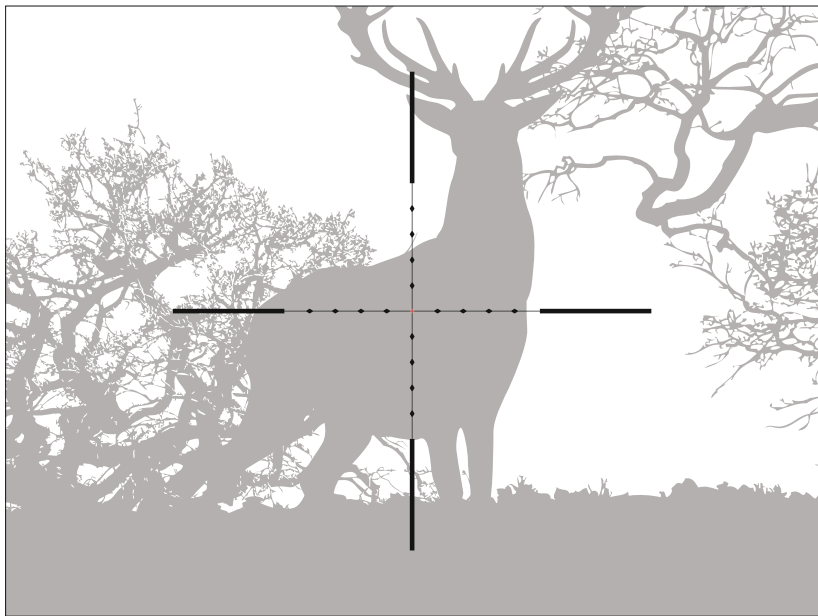

Reticle

# M56Fi

Reticle parameters (apply to all magnifications)

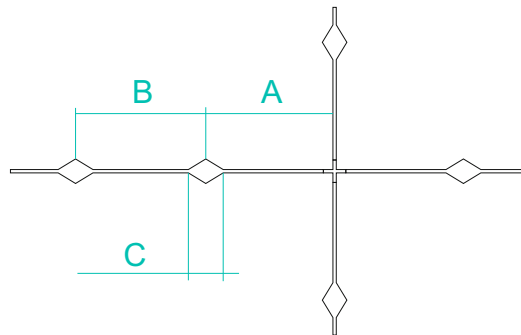


	MOA	cm @ 100 m
<b>Section A</b>	3.5	10 (1 mil)
<b>Section B</b>	3.5	10 (1 mil)
<b>Section C</b>	0.86	2.5 (0.25 mil)



Digital NV Riflescopes

# SIGHTLINE


N450 / N455  
N450S / N455S

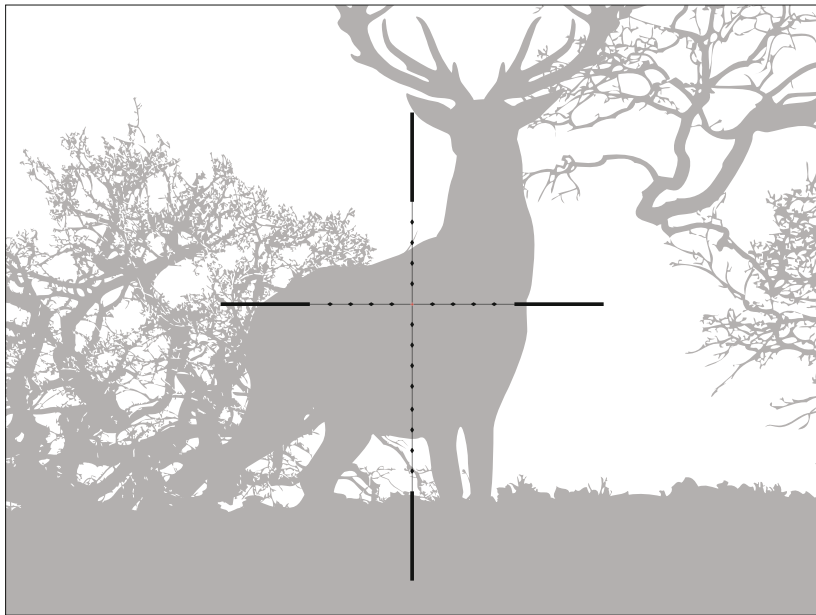

Reticle

# M57Fi

Reticle parameters (apply to all magnifications)

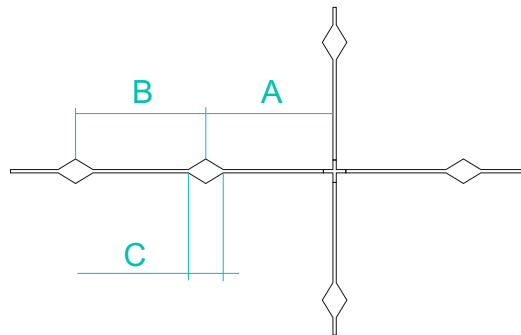

	MOA	cm @ 100 m
<b>Section A</b>	3.5	10 (1 mil)
<b>Section B</b>	3.5	10 (1 mil)
<b>Section C</b>	0.86	2.5 (0.25 mil)





Digital NV Riflescopes

# SIGHTLINE


N470 / N475  
N470S / N475S



Reticle

# D50i

Reticle parameters (for 6x magnification)

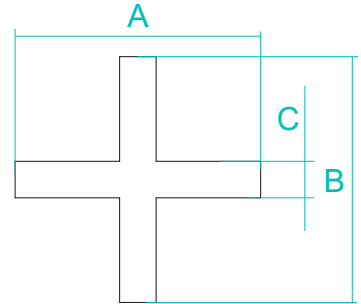


	MOA	cm @ 100 m
<b>Section A</b>	1.8	5.3
<b>Section B</b>	1.8	5.3
<b>Section C</b>	0.3	0.8



Digital NV Riflescopes

# SIGHTLINE


N470 / N475  
N470S / N475S

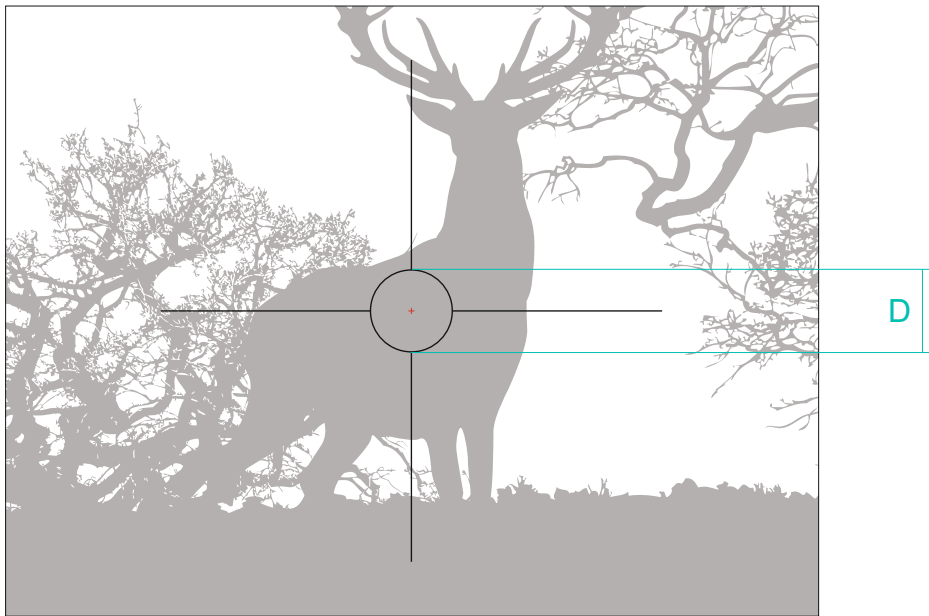

Reticle

# X54i

Reticle parameters (for 6x magnification)





	MOA	cm @ 100 m
<b>Section A</b>	1.8	5.3
<b>Section B</b>	1.8	5.3
<b>Section C</b>	0.3	0.8
<b>Section D</b>	34.4	100



Digital NV Riflescopes

**SIGHTLINE**

N470 / N475  
N470S / N475S

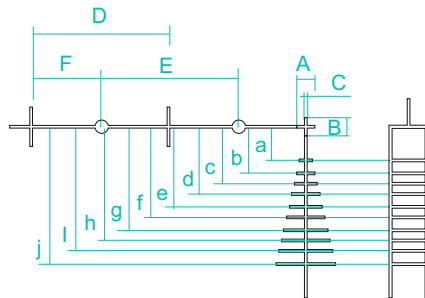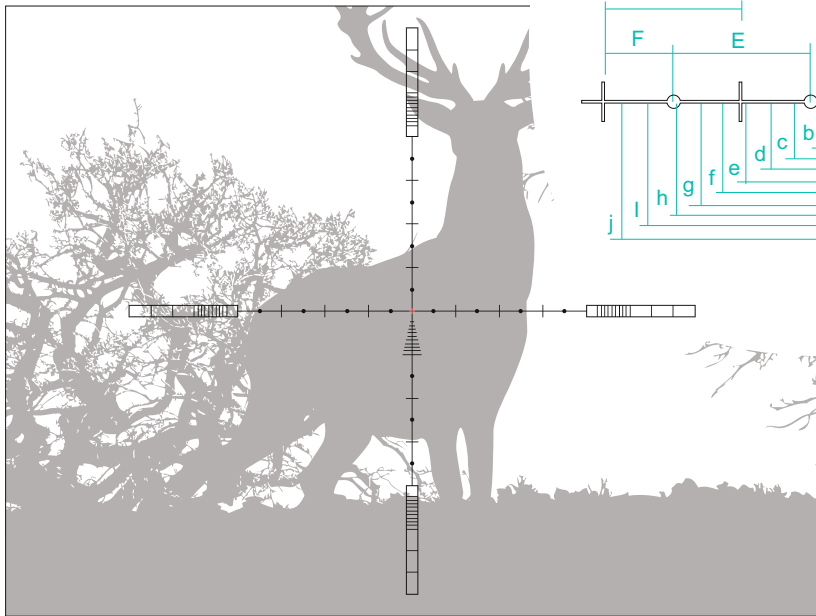

Reticle

**M58i**

Reticle parameters

	MOA	cm @ 100 m
<b>Section A</b>	1.8	5.3 on 6x
<b>Section B</b>	1.8	5.3 on 6x
<b>Section C</b>	0.3	0.8 on 6x
<b>Section D</b>	3.5	10 (1 mil) on 24x
<b>Section E</b>	3.5	10 (1 mil) on 24x
<b>Section F</b>	3.5	10 (1 mil) on 12x

- Section a:** 1 mil (10 cm @ 100 m) on 6x
- Section b:** 1 mil (10 cm @ 100 m) on 8x
- Section c:** 1 mil (10 cm @ 100 m) on 10x
- Section d:** 1 mil (10 cm @ 100 m) on 12x
- Section e:** 1 mil (10 cm @ 100 m) on 14x
- Section f:** 1 mil (10 cm @ 100 m) on 16x
- Section g:** 1 mil (10 cm @ 100 m) on 18x
- Section h:** 1 mil (10 cm @ 100 m) on 20x
- Section i:** 1 mil (10 cm @ 100 m) on 22x
- Section j:** 1 mil (10 cm @ 100 m) on 24x



Digital NV Riflescopes



**SIGHTLINE**

N470 / N475  
N470S / N475S

Reticle

# X51 FI-300

Reticle parameters (apply to all magnifications)

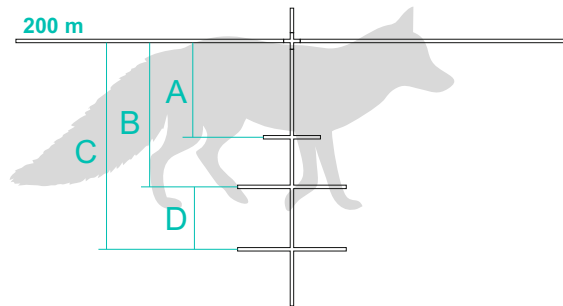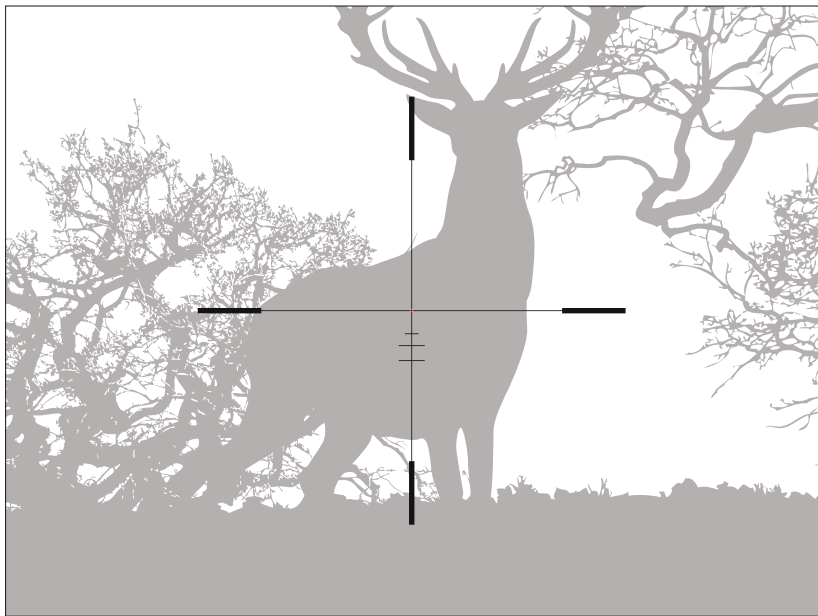


	200 m	300 m
<b>Section A</b>	15 cm (fox body)	23 cm (roe deer body)
<b>Section B</b>	23 cm (roe deer body)	35 cm (wild boar body)
<b>Section C</b>	35 cm (wild boar body)	50 cm (deer body)
<b>Section D</b>	—	15 cm (fox body)



Digital NV Riflescopes

# SIGHTLINE


N470 / N475  
N470S / N475S

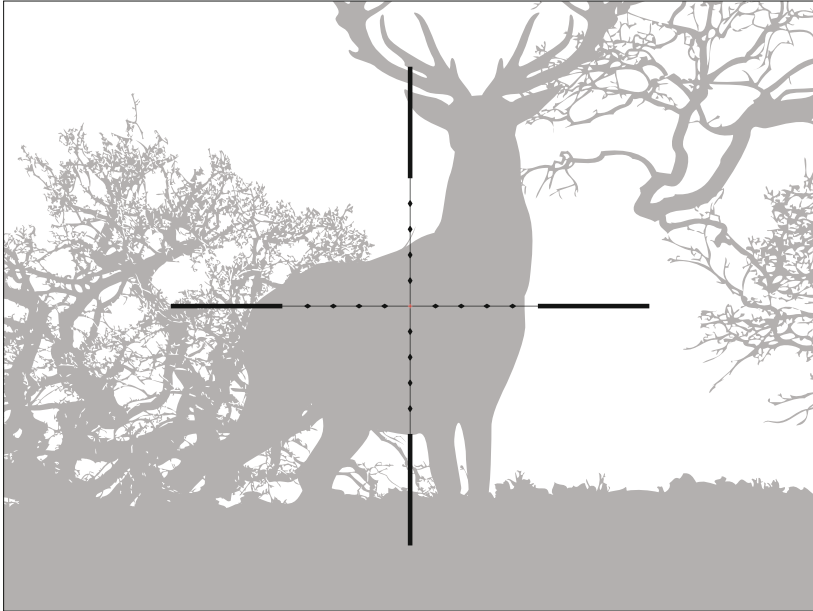

Reticle

# M56Fi

Reticle parameters (apply to all magnifications)

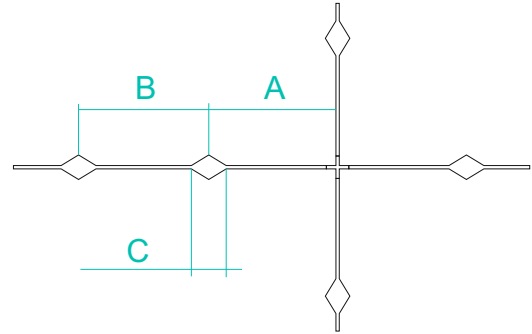


	MOA	cm @ 100 m
<b>Section A</b>	3.5	10 (1 mil)
<b>Section B</b>	3.5	10 (1 mil)
<b>Section C</b>	0.86	2.5 (0.25 mil)



Digital NV Riflescopes

**SIGHTLINE**


N470 / N475  
N470S / N475S

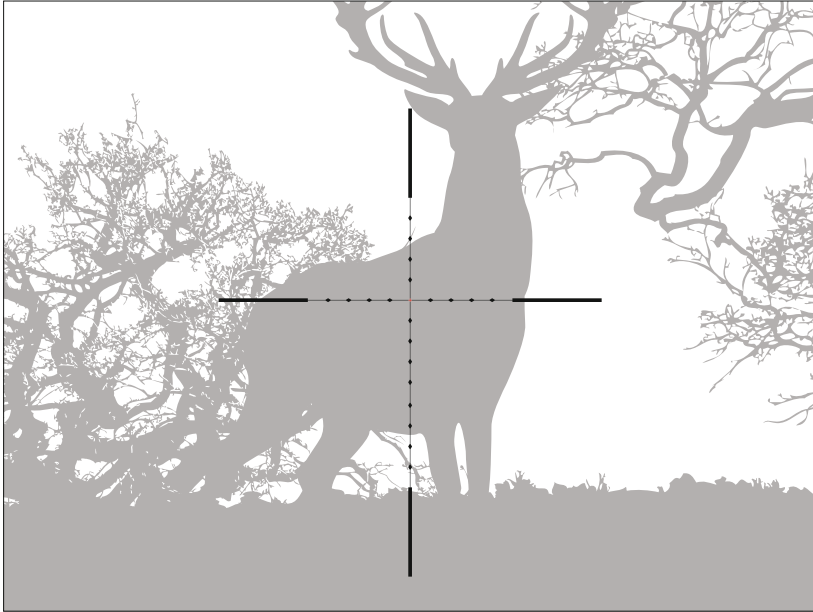

Reticle

**M57Fi**

Reticle parameters (apply to all magnifications)

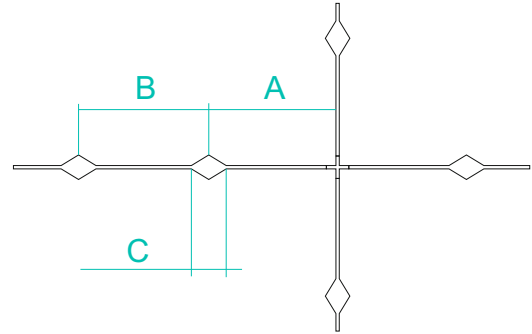

	MOA	cm @ 100 m
<b>Section A</b>	3.5	10 (1 mil)
<b>Section B</b>	3.5	10 (1 mil)
<b>Section C</b>	0.86	2.5 (0.25 mil)



**SIGHTLINE RETICLE**  
**CATALOGUE**



Facebook  
@YukonAdvancedOptics  
Worldwide



Youtube  
Yukon Advanced Optics  
Worldwide



Instagram  
@yukon.advanced.optics