

SP-3024

Cantilever Scope Mount Ø30 H48mm/1.89" OMIL PIC

Extended Height Cantilever Mount

 Rings:
 30 mm

 Tilt:
 0 MIL/MOA

 Height:
 48 mm/1.89"


 Length:
 140 mm/5.51"

 Weight:
 256 g/9.0 oz

 Interfaces:
 7 sets

 EAN:
 7340150700836

The IDEAL SCOPE MOUNT SYSTEM series of mounts feature seven set of interfaces to attach any of more than 40 different accessories. The rings are diagonally cut for increased visibility of the elevation and windage turrets (US Patent 8,733,011).

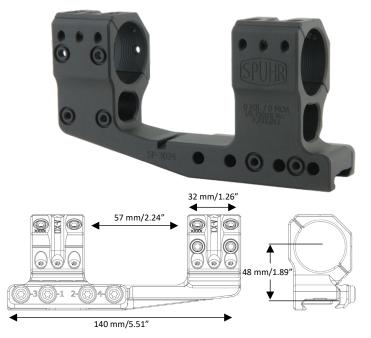

The mounts are machined from billet 7000-series aluminum and all aluminum parts are hardcoat anodized. The Torx 20 ring and clamping screws are zinc-nickel coated for corrosion resistance and come pre-waxed from the factory to ensure proper torque values.

The mount is shipped with a manual and a "wedge" leveling key.

NOTE:

The SP-3024 was designed for applications where an extended height cantilever mount is needed, such as when aiming over an illuminator or when aligning with high night vision devices. This mount will also work well for shooter who want to keep their head up for maximum situational awareness.

The SP-3024 will fit most 30 mm scope tubes except for scopes with extended erector housings, such as the US Optics TPAL/EREK. This mount was designed for use on AR-15 carbines and does not align with back-up iron sights. Due to the extreme cantilever, the SP-3024 does not feature a bubble level as the rest of the ISMS series do.

CONTACT

Spuhr i Dalby ABPhone:+46 46 712 012Web:www.spuhr.com

Address:

Terminalvägen 19 SE-246 42 Löddeköpinge Sweden