


SP-4804

Scope Mount Ø34 H48mm/1.89" 13MIL PIC

Picatinny mount for use with NV Equipment

| Rings: | 34 mm |
|-------------|-------------------------------|
| Tilt: | 13 MIL/44.4 MOA |
| Height: | 48 mm/1.89" |
| Length: | 121 mm/4.76" |
| Weight: | 265 g/8.3 oz |
| Interfaces: | 7 sets |
| EAN: | 7340150700379 |
| NSN: | 1005-22-623-8866 (Gen 1) |
| NSN: | 1005-22-625-6627 (Gen 1, Tan) |
| | |

The IDEAL SCOPE MOUNT SYSTEM series of mounts feature seven set of interfaces to attach any of more than 40 different accessories, and has a bubble level integrated in the rear plane of the mount

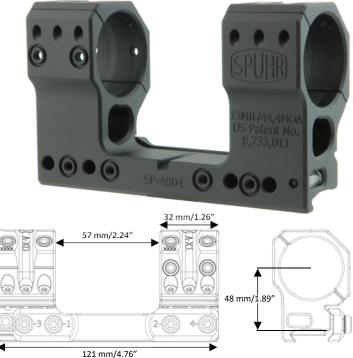

body to prevent canting of the rifle. The rings are diagonally cut for increased visibility of the elevation and windage turrets (US Patent 8,733,011).

The mounts are machined from billet 7075 T651 aluminum and all aluminum parts are hardcoat anodized. The Torx 20 ring and clamping screws are zinc-nickel coated for corrosion resistance. The screws come pre-waxed from the factory to ensure proper torque values.

The mount is shipped with a manual and a "wedge" leveling key.

NOTE:

The SP-4804 is designed for use on rifles with MIL-STD-1913 or STANAG 4694 rails together with high clip-on NV attachments such as the NSV-80. The SP-4804 will fit most 34 mm scope tubes except for scopes with extended erector housings, such as the US Optics TPAL/EREK and the Nightforce BEAST.



Spuhr i Dalby ABPhone:+46 46 712 012Web:www.spuhr.com

Address:

Terminalvägen 19 SE-246 42 Löddeköpinge Sweden