HELIA 2-10x50i

THE PERFECT ALL-ROUNDER



The HELIA series impresses with uncompromising focus on the real essentials: functionality, reliability, handling and aesthetics. The perfect tool for hunting.

PRODUCT HIGHLIGHTS

• Perfect all-rounder with large, high-contrast field of view and excellent performance during dawn and dusk


KAHLES

- Ideal for night hunting in combination with night vision devices (clip-ons)
- Powerful optics system with exceptional edge sharpness
- Day/night illuminated reticle with intelligent automatic switch-off


TECHNICAL DATA

Objective lens diameter:50 mmEye relief:95 mmField of view:21.0 - 4.1 m/ 100 mDiopter compensation:+2 / -3.5 dptTwilight factor (DIN 58388):6,2 - 22,4Impact correction per click:0.36 inch (100 yds)In mm (100 m)1.0 mm (100 m).1 MIL1.6 / 1.6 mAdjustment range (E/W):1.6 / 1.6 mTube diameter:30 mmIcength:341 mmWeight:585 gFocal plane:2Illuminated:YesWarranty:10 years	Magnification:	2 - 10
Field of view: 21.0 - 4.1 m/100 m Diopter compensation: +2 / -3.5 dpt Twilight factor (DIN 58388): 6,2 - 22,4 Impact correction per click: 0.36 inch (100 yds) 10 mm (100 m) 10 mm (100 m) .1 MIL Adjustment range (E/W): 1.6 / 1.6 m Tube diameter: 30 mm Length: 585 g Focal plane: 2 Illuminated: Yes	Objective lens diameter:	50 mm
Diopter compensation:+2 / -3.5 dptTwilight factor (DIN 58388):6,2 - 22,4Impact correction per click:0.36 inch (100 yds)10 mm (100 m).1 MILAdjustment range (E/W):1.6 / 1.6 mTube diameter:30 mmLength:341 mmWeight:585 gFocal plane:2Illuminated:Yes	Eye relief:	95 mm
Twilight factor (DIN 58388):6,2 - 22,4Impact correction per click:0.36 inch (100 yds) 10 mm (100 m) .1 MILAdjustment range (E/W):1.6 / 1.6 mTube diameter:30 mmLength:341 mmWeight:585 gFocal plane:2Illuminated:Yes	Field of view:	21.0 - 4.1 m/100 m
Impact correction per click:0.36 inch (100 yds) 10 mm (100 m) .1 MILAdjustment range (E/W):1.6 / 1.6 mTube diameter:30 mmLength:341 mmWeight:585 gFocal plane:2Illuminated:Yes	Diopter compensation:	+2 / -3.5 dpt
10 mm (100 m).1 MILAdjustment range (E/W):1.6 / 1.6 mTube diameter:30 mmLength:341 mmWeight:585 gFocal plane:2Illuminated:Yes	Twilight factor (DIN 58388):	6,2 - 22,4
Tube diameter:30 mmLength:341 mmWeight:585 gFocal plane:2Illuminated:Yes	Impact correction per click:	
Length:341 mmWeight:585 gFocal plane:2Illuminated:Yes		.1 MIL
Weight:585 gFocal plane:2Illuminated:Yes	Adjustment range (E/W):	
Focal plane:2Illuminated:Yes		1.6 / 1.6 m
Illuminated: Yes	Tube diameter:	1.6 / 1.6 m 30 mm
	Tube diameter: Length:	1.6 / 1.6 m 30 mm 341 mm
Warranty: 10 years	Tube diameter: Length: Weight:	1.6 / 1.6 m 30 mm 341 mm 585 g
	Tube diameter: Length: Weight: Focal plane:	1.6 / 1.6 m 30 mm 341 mm 585 g 2

FEATURES

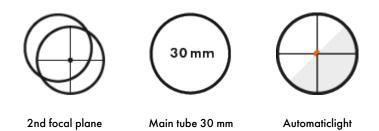

RETICLES / SUBTENSIONS



4-Dot